




Roof entry versions also available

Unit is housed in a high strength, galvanised, weatherproof steel structure

- The condenser fan arrangement allows for indoor use
- Fitted with new efficient microchannel condensers and high performance evaporator coils
- Fully wired internally mounted electrical panel with system controller
- Factory pre-charged and simulation tested
- Designed for African conditions



Product Specifications

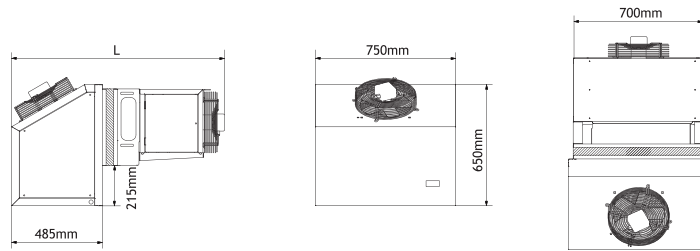

Physical Data

Plug Thickness	[mm]	60	80	100	150
Dimensions	L	1120	1140	1160	1210

Unit Specifications

Model Number	Unit		Compressor		Unit Capacity		Max. Room Volume [m³]	Cut Out Size l x h [mm]	Unit Fans Diameter [mm]
	Type	Maximum Current [A]	Power [kW/hp]	Oil Type	MT @ +2°C room temp.	LT @ -18°C room temp.			
		220-240V/1~/50Hz							
CEM-1250Z-A1	A	11	0.83/1.25	POE	2.03	-	14	710 x 420	300
CEM-1500Z-A1	A	16,3	1.10/1,50	POE	4.13	-	31	710 x 420	300
CEL-1500Z-A1	A	10,6	1.10/1.50	POE	-	1.71	10	710 x 420	300
CEL-2000Z-A1	A	16,9	1.47/2/00	POE	-	2.41	14	710 x 420	300

All products in this brochure are produced and manufactured by Cubicool International (Pty) Ltd. Cubicool International (Pty) Ltd cannot accept responsibility for possible errors in this brochure. Cubicool International (Pty) Ltd reserves the right to alter its products without notice. All trademarks in this brochure are property of their respective companies.